

Design Guide – Splashbacks

Installation – Must be performed by a Tiling Installer approved by The Laminex Group. Please see website for latest list of approved fabricators & installers

Tile Size – The full sheet size of 3000 x 1000mm can be used for vertical wall applications.

Substrate – Laminam can be used over many substrates, such as gypsum and fibre cement walls, concrete and concrete block walls. It can also be overlaid over existing wall tiles which are in good condition.

All substrates must be completely flat, with a maximum deviation of 3mm per 2metres. Flatness differences must be smoothed. Depressions greater than 3mm can be filled with a suitable leveling compounds.

Joints – All joints should follow the BRANZ Good Practice Guide - Tiling. Standard grout joints are to be a minimum 2mm.

Thermal Insulation – For gas cooktops, Calcium Silicate / Mineral Fiberboard should be installed directly above the gas cooktop to a height of 150mm.

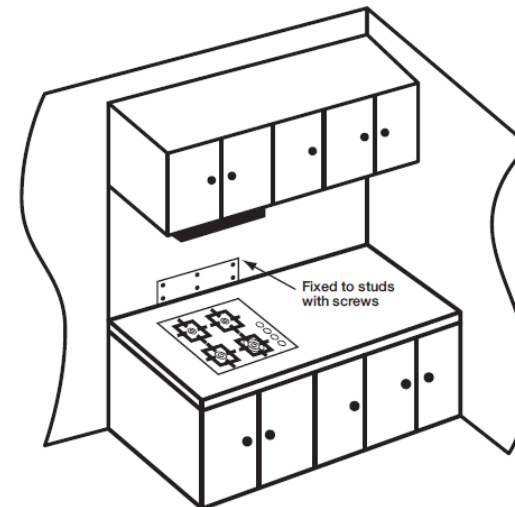


Figure : Installation of mineral board onto stud wall with self-tapping screws into the studs

Tips – The following colours have a directional grain running the length of the sheet. This may affect the material utilization.

Filo – Argento & Ghisa

Naturali – Travertine Avorio & Ossidiana Vena Scura

Edge Details

Edging Profiles. – 4.5mm x 4.5mm Aluminium

